


REV.	DATE	REVISION DESCRIPTION	PCN NO.
D	NOV.25.99	REDRAWN WITH CHANGE	99-27
E	OCT.16/00	PARTS BREAKDOWN DRAWING	----

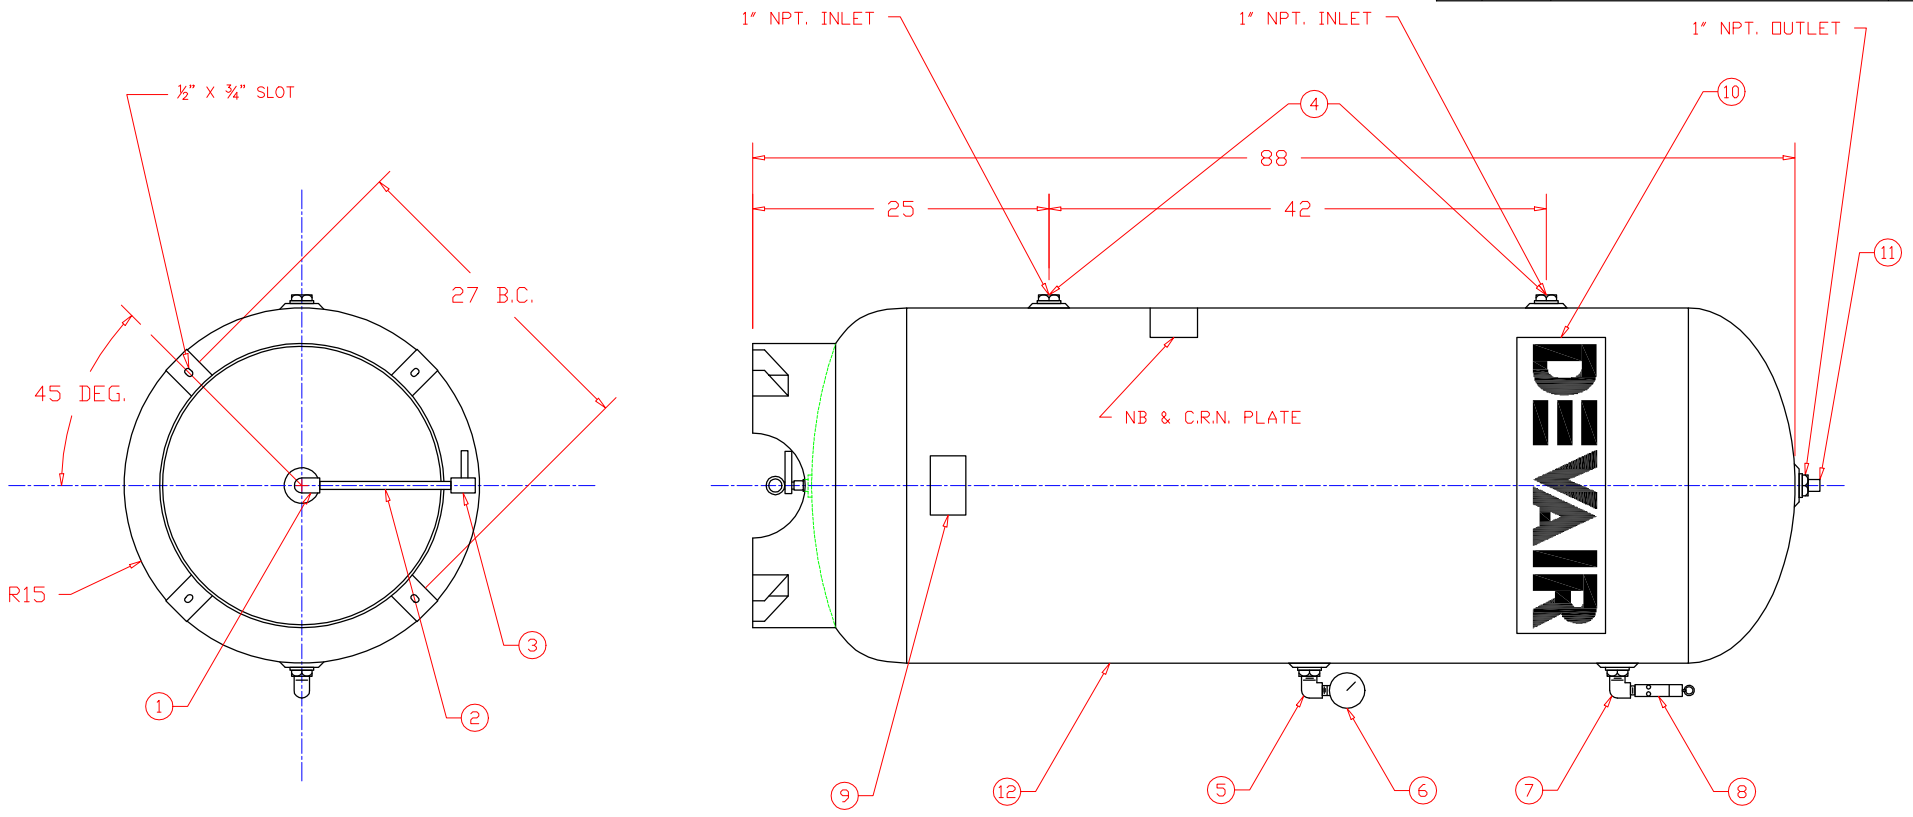

- NOTE: 1- TANK MUST BE PAINTED DEVAIR ORANGE.
 2- THREAD SEALANT MUST BE USED ON ALL THE FITTINGS.
 3- ALL THE FITTINGS MUST BE PLATED.

NO.	PART NO.	DESCRIPTION	NO.	PART NO.	DESCRIPTION
1	SS-1179	1/4" - GALV. ELBOW	7	SS-1073	1/2" - GALV. STREET ELBOW
	SS-1250	1/2"x1/4" BUSHING	8	SS-00617	SAFETY VALVE, 1/2" NPT. 200 PSI
2	SSP-419	1/4"x12" GALV. NIPPLE	9	LA-1923	DRAIN LABEL
3	VA-9411	BALL VALVE 1/4"x1/4" NPT.	10	LA-9429	DEVAIR LABEL
4	SS-3185	1" THREAD PROTECTOR (2)	11	SS-1232	1" PIPE PLUG
5	SS-1071	1/4" - GALV. STREET ELBOW	12	TA-9006-2	240 GAL. VERTICAL AIR RECEIVER
6	GA-250	PRESSURE GAUGE, 300 PSI. 2" DIA.			

IMPORTANT NOTE: This print is the confidential property of DEVAIR, INC. It is not to be used or reproduced in any manner, nor submitted to other parties for examination without the prior approval of DEVAIR, INC.

FRACTIONAL DIMENSIONS: ±1/32 DECIMAL DIMENSION: ±.005 ANGLES: ±1° *UNLESS OTHERWISE SPECIFIED	<h1>DEVAIR</h1>	NAME OF PROJECT		DESCRIPTION OF DRAWING	
		240 GAL. VERTICAL AIR RECEIVER		AIR RECEIVER	
		DRAWN BY	CHECKED BY	DATE	SCALE
ADAM SMITH		OCT.16/00	N.T.S.	TA-9008-2	E